




LS-EM

**DIMENSIONS**

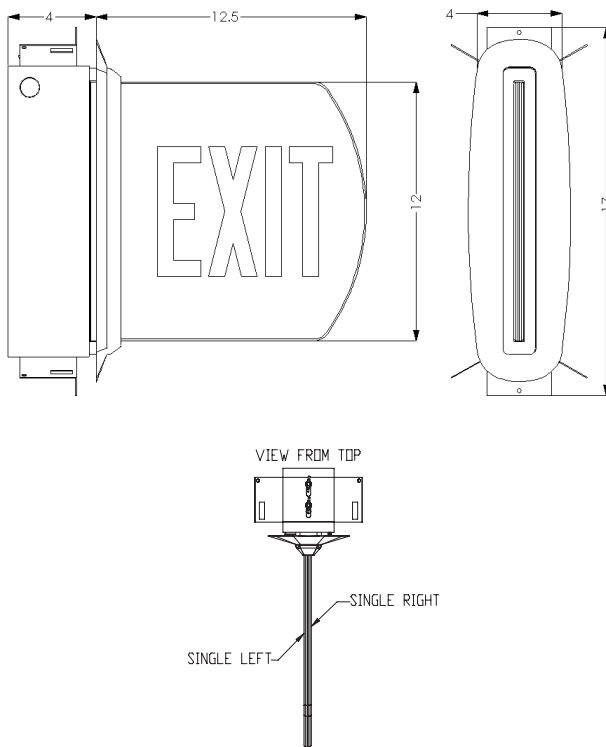

**GENERAL DESCRIPTION**

A brilliant combination of superior performance and aesthetics, the LSCM Cold Cathode (Fluorescent Lamps) Edge lit Exit sign provides a solution for the medium to upscale application. Uniquely crafted from Die Cast, the LS-CM collection is flexible enough to meet all of your stringent mounting requirements with all of the options necessary to facilitate life safety in the event of power loss.

**HOUSING**

Rigid Galvanized steel back box recesses into any ceiling or wall application complete with all necessary mounting hardware. The trim plate is machined and hand crafted from a solid Aluminum casting. Brushed Aluminum is standard.

**PANEL FACE**

Injection Molded Acrylic uniquely contoured with diamond cut beveled edges offers your choice of frequency matched silkscreened 6" lettering and chevrons. Custom signage is also available. (Consult Factory)

**ILLUMINATION**

Bright White (full Color Spectrum) even illumination enhances the beauty of the design via low maintenance long life cold cathode lamping with an estimated life expectancy of 7 plus years.

**ELECTRONICS**

AC only and emergency operation options available. Provides 90 minutes of illumination upon loss of power. Emergency operation units provided with solid-state design with low voltage disconnect, AC lock-out, brown out protection, and AC indicator test switch. Battery is sealed maintenance free Nickel Cadmium with an estimated service life of 7 years. Circuitry is constant current design and recharge time is less than the required UL 924 standard. All units draw less than 7 watts.

**CODE COMPLIANCE**

Tested and listed to UL 924. Meets or exceeds NAPA NEC and OSHA illumination standards.

**WARRANTY**

5 years on housing and electronics with a 7 year pro rated warranty on the battery.

LS-EM						
Model	No. of Faces	Letter Color / Background	Chevron Direction	Battery Backup	TRIM FINISH OPTIONS	
1R=Single Right 1L=Single Left 2=Double	RC=Red on Clear (note 1) RW=Red on White RB=Red on black RM=Red w/mirrored GC=Green on Clear (note 1) GW=Green on White GM=Green w/ Mirrored GB=Green on black  note 1: single sided only	NC No Chevron AR Right AL Left AD Double	AC AC Only EM Emergency	BA BRUSHED ALUMINUM (STANDARD) WH POWDER COATED WHITE BK POWDER COATED BLACK		