


SXPJ SERIES


HID & Fluorescent Lighting for Hazardous and Hostile Locations

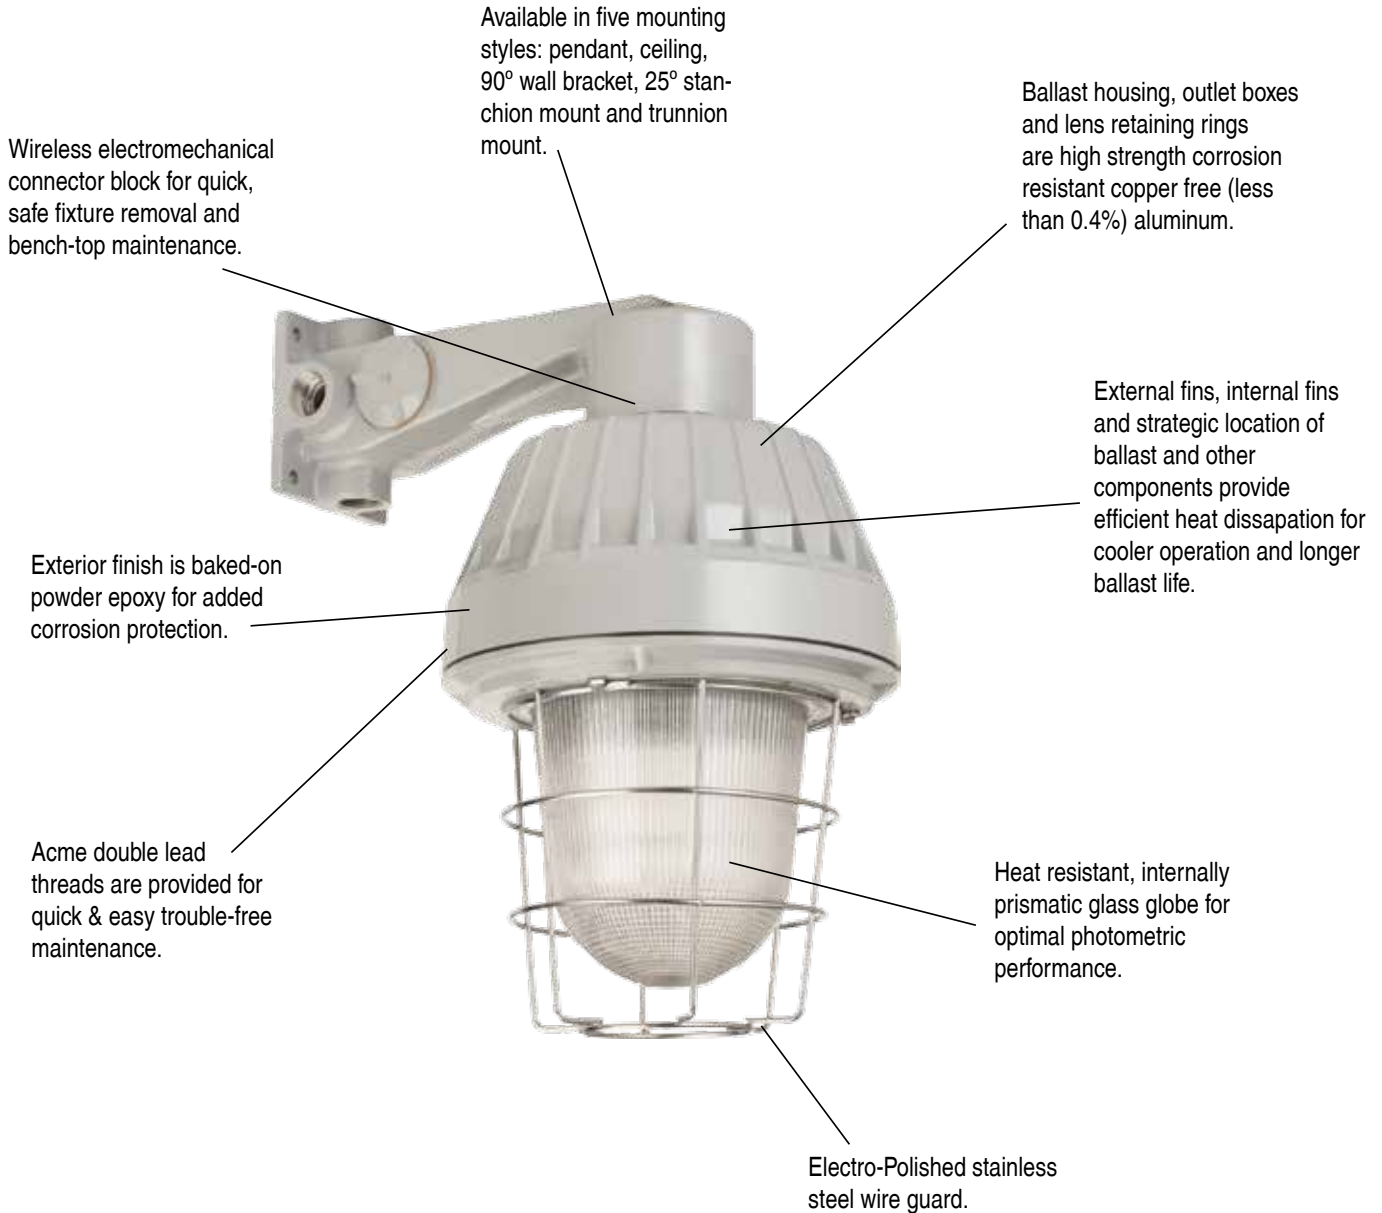

- Factory sealed—external seals not necessary
- Fiberglass reinforced polymeric and aluminum reflectors are available as accessories

Catalog Number Logic

SXPJ 15-S-04-GG-P-XX



1 BASIC SERIES
 Class I, Division 1, Groups C & D
 Class II, Division 1, Groups E, F & G*
 Class III
 Class I, Zone 1, Groups IIA & IIB
 Factory Sealed
 UL1598, UL1598A, & UL844
 CUL
 NEMA Type 4X, IP66

2 LAMP CURRENT/LAMP WATTAGE
 26 = 26 Watt
 32 = 32 Watt
 42 = 42 Watt
 50 = 50 Watt
 52 = 52 Watt
 64 = 64 Watt
 07 = 70 Watt
 84 = 84 Watt
 10 = 100 Watt
 15 = 150 Watt
 17 = 175 Watt

3 LAMP TYPE
 H = Metal Halide (Medium Base)
 (50, 70, 100, 150 & 175 Watt)
 S = High Pressure Sodium (Medium Base)
 (50, 70, 100 & 150 Watt)
 F = Compact Fluorescent
 (26, 32, 42, 52, 64 & 84 Watt)

4 BALLAST VOLTAGE
 04 = 120/208/240/277V 60HZ
 22 = 220V/240V 50HZ
 48 = 480V 60HZ
 U = 120 thru 277V 50/60HZ
 (compact fluorescent)

5 GLOBE & GUARD
 GG = Globe and Guard
 G = Globe only

6 MOUNTING STYLE
 P = 3/4" Pendant Mount
 P1 = 1" Pendant Mount
 C = 3/4" Ceiling Mount
 C1 = 1" Ceiling Mount
 W = 3/4" Wall Mount
 W1 = 1" Wall Mount
 S = 1-1/4" Stanchion Mount
 S1 = 1-1/2" Stanchion Mount
 T = Trunnion Mount*

7 OPTIONS¹
 FB1 = Single Fuse Block ^{2 3}
 FB2 = Double Fuse Block ^{2 3}
 EM = Emergency Battery Backup
 w/ AC Ballast (CFL Only)⁴
 EMO = Emergency Only Battery
 Backup w/o AC Ballast
 (CFL Only)⁴
 PS = Pulse Start (for 150 & 175W MH Lamps)
 BP = Ballast Protector
 SC = Safety Cable & Eye Bolt
 EB = Eye Bolt Only

¹ Consult factory for pricing.
² Not available with multi-tap ballast unless voltage is specified.
 When installed, one fuse block is provided for 120,277V and
 two fuse blocks are provided for 208, 220, 240 & 480V.
 Fuse not included.
³ Fuse option not available for marine listed fixtures.
⁴ For non-switched circuits only.


* Trunnion mount not approved for use in Class II environments

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.









Certification Guide

MODEL	TYPE (*)	LAMP WATTS	MOUNT	AMBIENT TEMPERATURE °C	CLASS I DIVISION 1 GROUPS C & D	CLASS I ZONE 1 GROUPS IIA & IIB	CLASS II DIVISION 1 GROUPS E, F & G, CLASS III	SUPPLY WIRE SUITABLE TEMPERATURE °C	UL 1598A
SXPJ15S	HPS	150	P,C,W,S,T	40	T4	T4	--	90	YES
SXPJ15S	HPS	150	P,C,W,S,T	55	T4	T4	--	90	YES
SXPJ10S	HPS	100	P,C,W,S	40	T4A	T4	T4	90	YES
SXPJ10S	HPS	100	T	40	T4A	T4	--	90	YES
SXPJ10S	HPS	100	P,C,W,S,T	55	T4A	T4	--	90	YES
SXPJ10S	HPS	100	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ07S	HPS	70	P,C,W,S	40	T5	T5	T4A	90	YES
SXPJ07S	HPS	70	T	40	T5	T5	--	90	YES
SXPJ07S	HPS	70	P,C,W,S,T	55	T5	T5	--	90	YES
SXPJ07S	HPS	70	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ05S	HPS	50	P,C,W,S	40	T5	T5	T4A	90	YES
SXPJ05S	HPS	50	T	40	T5	T5	--	90	YES
SXPJ05S	HPS	50	P,C,W,S,T	55	T5	T5	--	90	YES
SXPJ05S	HPS	50	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ17H	PSMH	175	P,C,W,S,T	40	T3C	T3	--	90	YES
SXPJ17H	PSMH	175	P,C,W,S,T	55	T3C	T3	--	90	YES
SXPJ15H	PSMH	150	P,C,W,S,T	40	T3C	T3	--	90	YES
SXPJ15H	PSMH	150	P,C,W,S,T	55	T3C	T3	--	90	YES
SXPJ10H	PSMH	100	P,C,W,S,T	40	T4A	T4	--	90	YES
SXPJ10H	PSMH	100	P,C,W,S,T	55	T4A	T4	--	90	YES
SXPJ10H	PSMH	100	P,C,W,S,T	65	T4	T4	--	90	YES
SXPJ07H	PSMH	70	P,C,W,S	40	T5	T5	T4A	90	YES
SXPJ07H	PSMH	70	T	40	T5	T5	--	90	YES
SXPJ07H	PSMH	70	P,C,W,S,T	55	T4A	T4	--	90	YES
SXPJ07H	PSMH	70	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ05H	PSMH	50	P,C,W,S	40	T5	T5	T4A	90	YES
SXPJ05H	PSMH	50	T	40	T5	T5	--	90	YES
SXPJ05H	PSMH	50	P,C,W,S,T	55	T4A	T4	--	90	YES
SXPJ05H	PSMH	50	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ03H	PSMH	39	P,C,W,S	40	T5	T5	T4A	90	YES
SXPJ03H	PSMH	39	T	40	T5	T5	--	90	YES
SXPJ03H	PSMH	39	P,C,W,S,T	55	T4A	T4	--	90	YES
SXPJ03H	PSMH	39	P,C,W,S,T	65	T4A	T4	--	90	YES
SXPJ26F	CFL	26	P,C,W	40	T6	T6	T6	90	YES
SXPJ26F	CFL	26	S	40	T5	T5	T5	90	YES
SXPJ26F	CFL	26	T	40	T5	T5	--	90	YES
SXPJ26F	CFL	26	P,C,W	55	T6	T6	--	90	YES
SXPJ26F	CFL	26	S,T	55	T5	T5	--	90	YES
SXPJ32F	CFL	32	P,C,W	40	T6	T6	T6	90	YES
SXPJ32F	CFL	32	S	40	T5	T5	T5	90	YES
SXPJ32F	CFL	32	T	40	T5	T5	--	90	YES
SXPJ32F	CFL	32	P,C,W	55	T6	T6	--	90	YES
SXPJ32F	CFL	32	S,T	55	T5	T5	--	90	YES
SXPJ42F	CFL	42	P,C,W	40	T6	T6	T6	90	YES
SXPJ42F	CFL	42	S	40	T5	T5	T5	90	YES
SXPJ42F	CFL	42	T	40	T5	T5	--	90	YES
SXPJ42F	CFL	42	P,C,W	55	T6	T6	--	90	YES
SXPJ42F	CFL	42	S,T	55	T5	T5	--	90	YES
SXPJ52F	CFL	52	P,C,W	40	T6	T6	T5	90	YES
SXPJ52F	CFL	52	S	40	T5	T5	T5	90	YES
SXPJ52F	CFL	52	T	40	T5	T5	--	90	YES
SXPJ64F	CFL	64	P,C,W	40	T6	T6	T5	90	YES
SXPJ64F	CFL	64	S	40	T5	T5	T5	90	YES
SXPJ64F	CFL	64	T	40	T5	T5	--	90	YES
SXPJ84F	CFL	84	P,C,W	40	T6	T6	T5	90	YES
SXPJ84F	CFL	84	S	40	T5	T5	T5	90	YES
SXPJ84F	CFL	84	T	40	T5	T5	--	90	YES

(*) Medium base

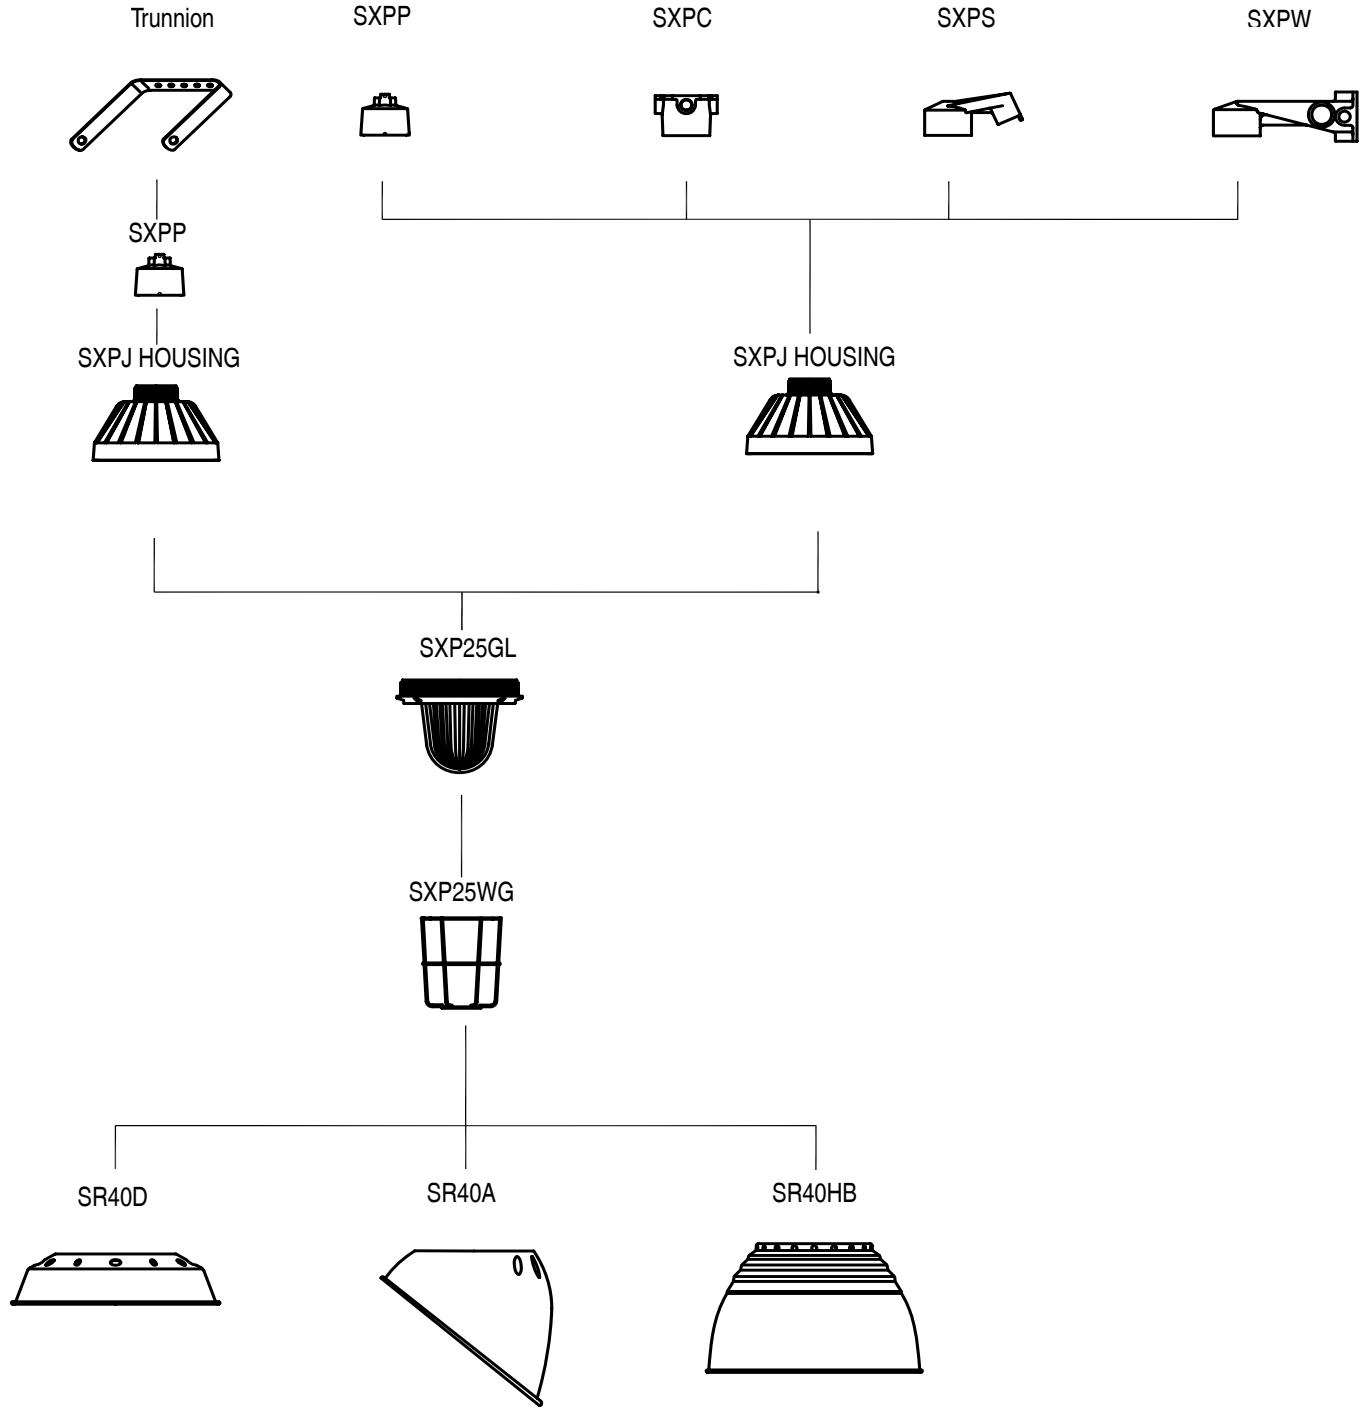


SXPJ Fixture Dimensions (inches)




REFLECTORS

STANDARD DOME



ANGLE



DEEP DOME

