

# ultra50

Photoluminescent Exit Sign

**tls** The Lighting Source



*Viewing Distance of 50'*


**Ultra Durable**  
**Ultra Eco Friendly**  
**Ultra Economical**  
**Ultra Light Weight**  
**Ultra Easy to Install**  
**Ultra Easy to Wash**  
**Ultra Thin**



Lights off

**NO FRAME NEEDED**

**15 Year Limited Warranty**

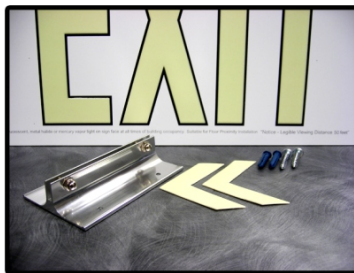

## Universal Kit

Includes everything you need!

- 1 Exit Sign, 9"Hx16"Lx1/8"W
- Pair of self adhesive directional chevrons
- Mounting Bracket and Hardware

**Available Colors**



Black



White



Silver



Green



Red

Non-electric  
 Non-radioactive  
 Non-hazardous  
 No expiration date  
 Energy efficient  
 LEED points qualified  
 Zero annual operating expense  
 No batteries  
 No bulbs  
 Low maintenance  
 100% reliable  
 High or low level  
 Simple installation  
 25+ year life expectancy



California State  
Fire Marshal Approved




Proudly  
Made in USA

*Designed for maximum durability, the BPL Ultra 50 Series photoluminescent exit sign is constructed using a poly metal material. Ideal for high location and low proximity use. Easy self adhesive directional chevrons. UL 924 Listed with four external charging light sources: unfiltered fluorescent, metal halide, LED, and mercury vapor.*

(T) 800.282.5600 | [evan@thelightsources.co](mailto:evan@thelightsources.co) | (F) 888.316-0457

Overall Size:	16"W x 9"H x .1/8" Thickness
Letter Size:	1" Stroke, 7" Height
Weight:	1 lbs
Construction:	Poly metal material with photoluminescent lettering
Illumination:	Strontium oxide aluminate photoluminescent pigment
Face Plate Colors:	Black, Green, Red, Silver, and White
Letter Color:	Photoluminescent, green Illuminating
Directional:	Two self adhesive photoluminescent chevrons for field application
Charging Time:	Initial charging time is 60 minutes.
Installation:	Install photoluminescent exit signs only in locations where an external illumination source is present, is deemed reliable, and is supplied by a circuit not controlled by automatic timers or sensors, and where controls are accessible only to authorized personnel. Minimum of 5 foot-candle (54lux) external illumination of unfiltered metal halide, fluorescent, mercury vapor or LED charging light sources required on sign face at all times of building occupancy.
Viewing Distance:	50 Feet - Sign will remain visible and legible in total darkness to observers standing 50 feet away from the sign for at least 90 minutes after all light has been extinguished.
Life Expectancy:	25+ years
Applications:	High location, floor proximity, indoor use only
Features:	Non-electrical, non-radioactive, explosion proof, UV-stable, durable, minimal installation and maintenance expense
Approvals:	UL 924 Listed. Meets NFPA 101 Life Safety Code, NFPA 5000, JCAHO & OSHA, ICC, - IBC, ICBO - UBC, BOCA - NBC, SBCCI - SBC, 1/UFC, CA Bldg. Code, ASTM 2072, and CSFM Listed
Product Care:	Periodically clean the sign face with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.
Warranty:	15 year limited warranty to the original customer against defects in workmanship and materials.

#### Mounting Options Surface • Ceiling • Flag • T-Bar

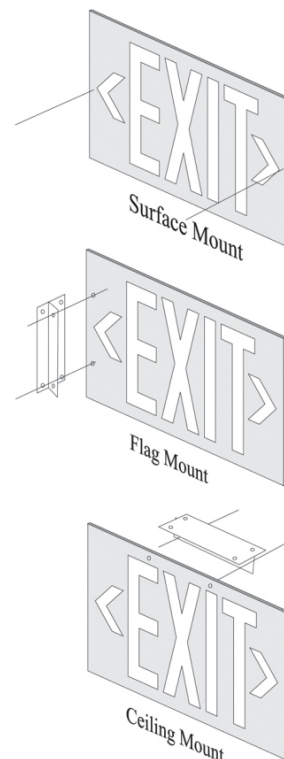

#### Description

black, wall mount exit sign  
black, single-sided sign w/bracket  
black, double-sided sign w/bracket  
black, single-sided sign w/T-bar bracket  
black, double-sided sign w/T-bar bracket  
silver, wall mount exit sign  
silver, single-sided sign w/bracket  
silver, double-sided sign w/bracket  
silver, single-sided sign w/T-bar bracket  
silver, double-sided sign w/T-bar bracket  
red, wall mount exit sign  
red, single-sided sign w/bracket  
red, double-sided sign w/bracket  
red, single-sided sign w/T-bar bracket  
red, double-sided sign w/T-bar bracket  
green, wall mount exit sign  
green, single-sided sign w/bracket  
green, double-sided sign w/bracket  
green, single-sided sign w/T-bar bracket  
green, double-sided sign w/T-bar bracket  
white, wall mount exit sign  
white, single-sided sign w/bracket  
white, double-sided sign w/bracket  
white, single-sided sign w/T-bar bracket  
white, double-sided sign w/T-bar bracket

#### Item No.'s

UT50WB  
UT50SB  
UT50DB  
UT50STB  
UT50DTB  
UT50WS  
UT50SS  
UT50DS  
UT50STS  
UT50DTS  
UT50WR  
UT50SR  
UT50DR  
UT50STR  
UT50DTR  
UT50WG  
UT50SG  
UT50DG  
UT50STG  
UT50DTG  
UT50WW  
UT50SW  
UT50DW  
UT50STW  
UT50DTW

